

## Tension Load Link

### Tension Link Series



#### FEATURES


- Plated tool steel construction.
- Rugged load cell design.
- Sealed to IP67.
- Simple to use.
- Custom build available.

#### APPLICATIONS

- Overload load protection.
- Crane weighing
- Test rigs




Option:  
Supplied in a carry case.

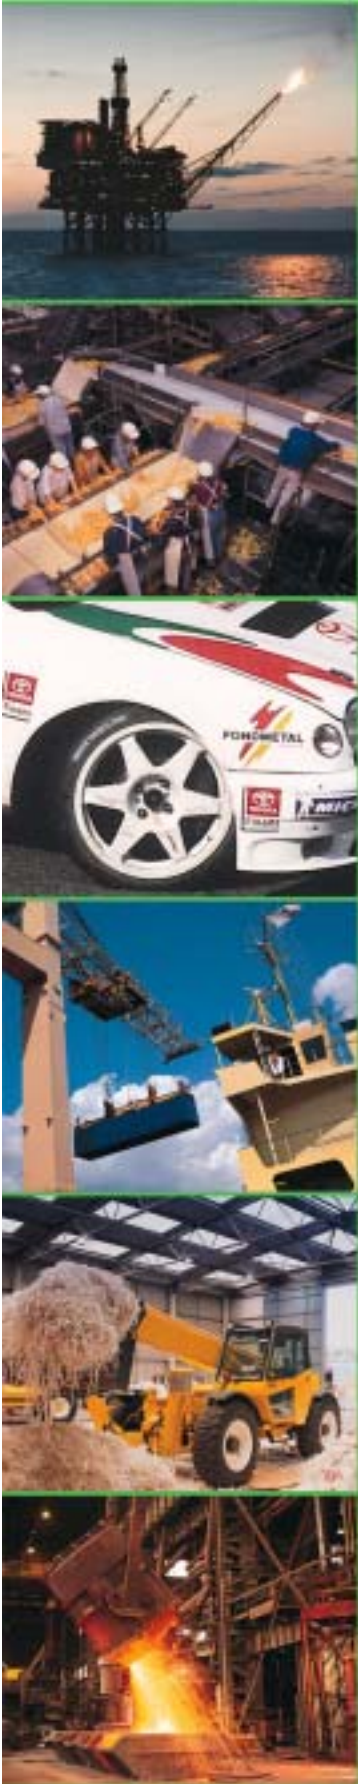



Procter & Chester Measurements

PARAMETER		UNITS
Rated Capacities	5, 10, 25, 45	Te
Rated Output	1.5 nominal	MV/V
Linearity and repeatability	0.3	±% of Rated Output
Zero Return after 30 minutes	0.15	±% of Applied Load
Zero Balance	1.5	±% of Rated Output
Temperature Range: Operating	-10 to +80	°C
Temperature Range: Compensated	-10 to +60	
Temperature Effect: On Output	0.1	±% of Applied Load/°C
Temperature Effect: On zero	0.01	±% of Rated Load/°C
Safe Overload	150	% of Rated Capacity
Ultimate Overload	500	% of Rated Capacity
Excitation: Recommended	10	Volts AC or DC
Excitation: Maximum	15	
Input Impedance	350 nominal	ohm
Output Impedance	350 nominal	ohm
Insulation Impedance	>2000	megaohm
Deflection at Rated Capacity	NA	mm
Weight (approximate) :	NA	kg
Construction	Plated tool steel	
Environmental Protection	IP67	
Cable	10m 4 core screened	
Connections – Produces a positive signal in Tension.	Excitation + Red Excitation – Blue Signal + Green Signal - Yellow	The Screen is not connected to the load cell body.
	0505	

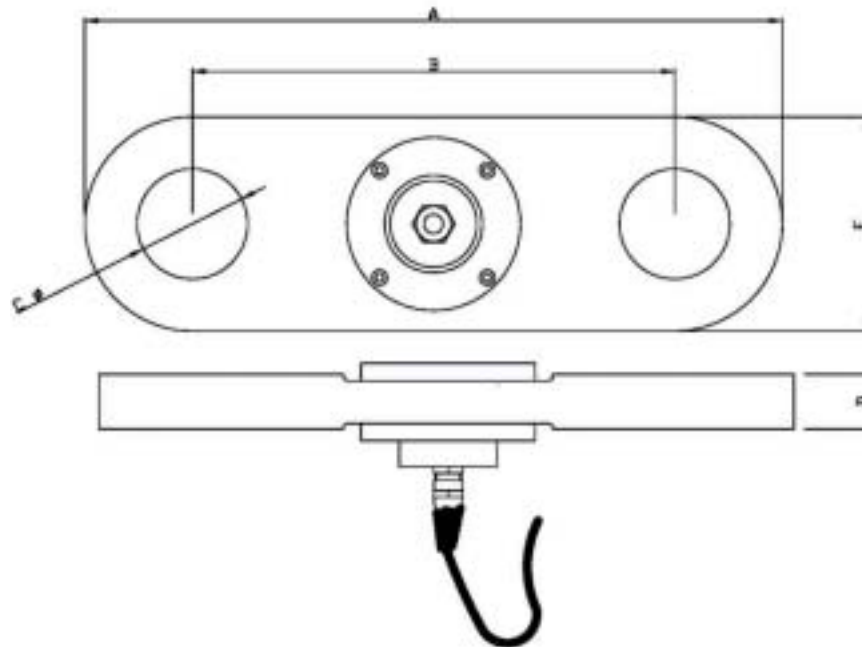

CAP.	A	B	C	D	E
	322	211	32	25.4	99
45 Te	540	340	80.5	32	200

Dimensions in mm

PCM produce custom design load cells, therefore we are able to modify the dimension and materials and build to order. PCM's policy is one of continuous improvement. We therefore reserve the right to incorporate technical modifications without prior notification. PCM are an approved ISO9001 manufacturer, Certificate No: 5527.